

# KENNEDY® PROFESSIONAL

# KENGRIP®


Patented Design



## Drive More With Less....

The Ken-Grip® socket offers a new standard of performance with the ability to grip fasteners which are up to 95% rounded off. A unique patented socket design grips new, worn and rusted fasteners without damaging them further.

- Will not damage worn or rusted fasteners
- Also fits a wide range of non-metric Hexagons, E-Torx® and Spline Drive Sizes
- Fully chrome plated finish for easy clean
- Unique 'Double-Knurl' for high grip
- Aluminium-free finish

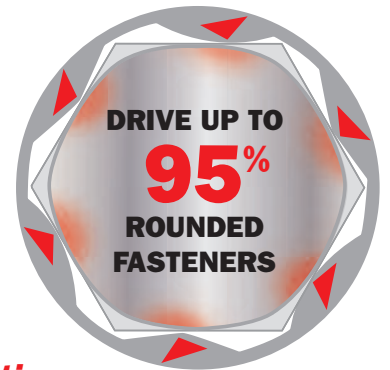

**Contact your Local Branch for a Demonstration**

### SOCKET SETS



Square Drive	Number of Pieces	Set Contents	Weight each	Order Code
	19	<b>Ken-Grip® Sockets:</b> 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 and 14mm. <b>Accessories:</b> ratchet handle, spinner handle, sliding T-handle, flexi-drive 145mm, universal joint, extension bar 100mm.	880g	<b>-8800K</b>
	50	<b>Ken-Grip® Sockets:</b> 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21 and 22mm. <b>Ken-Grip® Deep Sockets:</b> 10, 11, 12, 13, 14, 15, 17, 19 and 22mm. <b>Screwdriver Bits:</b> Slotted 5, 5.5 and 6.5mm. <b>Crosspoint</b> No.1, 2, 3, 4. <b>Hexagon Sockets:</b> 3, 4, 5, 6, 8 and 10mm. <b>Accessories:</b> ratchet handle, sliding T-handle, spinner handle, swivel handle, universal joint, 125 and 250mm extensions, 250mm wobble extensions, 1/4" and 1/2" male adaptors, 1/4" socket bit coupler. Robust fitted case with security padlock hole and cushion grip handle.	3.00kg	<b>-8810K</b>
	30	<b>Ken-Grip® Sockets:</b> 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 30 and 32mm. <b>Spark Plug Sockets:</b> M10 and M14. <b>Accessories:</b> quick release ratchet handle, sliding T-handle, universal joint, 75, 125 and 250mm extension bars. Robust fitted case with security padlock hole and cushion grip handle.	5.50kg	<b>-8820K</b>

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**



Kennedy KenGrip™ sockets will drive metric fasteners which are up to 95% rounded off and inch sizes which are up to 70% rounded off.


Each KenGrip™ socket can be used for up to five different fastener sizes. Kennedy KenGrip™ Side Drive Sockets are suitable for a wide range of fastener types, including ISO Metric, UNC, UNF, BSW, BSF and E-Torx.

The table below lists the most common sizes:

KenGrip Size	Width Across Flat	Max. Rounding Off	Also Suitable for:						
			Inch (AF)	Max. Rounding Off	BSW	BSF	BA	E-TRX Drive Size	
4mm	4mm	Up to 95%	5/32"	Up to 70%			8BA	E05	
4.5mm	4.5mm							7BA	
5mm	5mm		3/16"					6BA	E06
5.5mm	5.5mm								
6mm	6mm		7/32"					5BA	
7mm	7mm		1/4"					4BA	E08
8mm	8mm		5/16"					3BA	E10
9mm	9mm		11/32"					2BA	
10mm	10mm		3/8"					1BA	E12
11mm	11mm		13/32"					0BA	
12mm	12mm		7/16"				3/16"	1/4"	E14
13mm	13mm		1/2"						E16
14mm	14mm		17/32"				1/4"	5/16"	
15mm	15mm		9/16"						E18
16mm	16mm		5/8"				5/16"	3/8"	E20
17mm	17mm		21/32"						
18mm	18mm		11/16"				3/8"	7/16"	
19mm	19mm		3/4"						E24
20mm	20mm		25/32"						
21mm	21mm		13/16"				7/16"	1/2"	
22mm	22mm		27/32"						
23mm	23mm		7/8"						E28
24mm	24mm		15/16"				1/2"	9/16"	
25mm	25mm		31/32"						
26mm	26mm		1"				9/16"	5/8"	E32
27mm	27mm		11/16"						
30mm	30mm		15/32"						
32mm	32mm		1 1/4"				11/16"	3/4"	E40

### Deep Sockets

Conform to DIN3124.

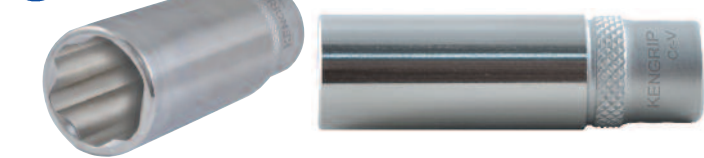


#### 3/8" Square Drive

Size	Overall Length	Weight each	Order Code KEN-582
8.0mm	62.0	40g	-5849K
9.0mm	62.0	40g	-5850K
10.0mm	62.0	50g	-5851K
11.0mm	62.0	50g	-5852K
12.0mm	62.0	60g	-5853K
13.0mm	62.0	60g	-5854K
14.0mm	62.0	70g	-5855K
15.0mm	62.0	100g	-5856K
16.0mm	62.0	115g	-5857K
17.0mm	62.0	130g	-5858K
18.0mm	64.0	120g	-5859K
19.0mm	64.0	140g	-5860K
21.0mm	64.0	155g	-5861K
22.0mm	64.0	200g	-5862K

### Standard Length Sockets

Conform to DIN3124.

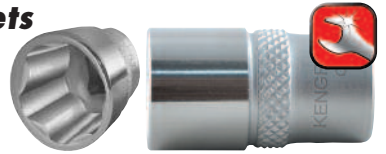

#### 1/4" Square Drive

Size	Overall Length	Weight each	Order Code KEN-582
4.0mm	25.0	10g	-4161K
4.5mm	25.0	10g	-4162K
5.0mm	25.0	10g	-4163K
5.5mm	25.0	10g	-4164K
6.0mm	25.0	10g	-4165K
7.0mm	25.0	20g	-4166K
8.0mm	25.0	20g	-4167K
9.0mm	25.0	20g	-4168K
10.0mm	25.0	20g	-4169K
11.0mm	25.0	30g	-4170K
12.0mm	25.0	30g	-4171K
13.0mm	25.0	30g	-4172K
14.0mm	25.0	40g	-4173K

#### 3/8" Square Drive

Size	Overall Length	Weight each	Order Code KEN-582
6.0mm	26.0	30g	-5832K
7.0mm	26.0	30g	-5833K
8.0mm	26.0	30g	-5834K
9.0mm	26.0	30g	-5835K
10.0mm	26.0	30g	-5836K
11.0mm	26.0	30g	-5837K
12.0mm	26.0	30g	-5838K
13.0mm	26.0	30g	-5839K
14.0mm	30.0	40g	-5840K
15.0mm	30.0	40g	-5841K
16.0mm	30.0	50g	-5842K
17.0mm	30.0	60g	-5843K
18.0mm	30.0	70g	-5844K
19.0mm	30.0	70g	-5845K
20.0mm	30.0	80g	-5846K
21.0mm	30.0	80g	-5847K
22.0mm	27.0	100g	-5848K

#### 1/2" Square Drive

Size	Overall Length	Weight each	Order Code KEN-582
8.0mm	36.0	50g	-6871K
9.0mm	37.0	50g	-6872K
10.0mm	37.0	50g	-6873K
11.0mm	37.0	50g	-6874K
12.0mm	37.0	50g	-6875K
13.0mm	37.0	50g	-6876K
14.0mm	37.0	50g	-6877K
15.0mm	37.0	60g	-6878K
16.0mm	37.0	60g	-6879K
17.0mm	37.0	60g	-6880K
18.0mm	37.0	80g	-6881K
19.0mm	37.0	70g	-6882K
20.0mm	37.0	80g	-6883K
21.0mm	37.0	70g	-6884K
22.0mm	37.0	90g	-6885K
23.0mm	37.0	110g	-6886K
24.0mm	37.0	110g	-6887K
25.0mm	40.0	150g	-6888K
26.0mm	40.0	140g	-6889K
27.0mm	40.0	170g	-6890K
28.0mm	40.0	170g	-6891K
29.0mm	40.0	170g	-6892K
30.0mm	45.0	210g	-6893K
32.0mm	45.0	230g	-6895K
33.0mm	45.0	230g	-6898K
36.0mm	45.0	245g	-6899K